


Metrische 45° wartelkoppeling 24° conus en o-ring type D45  
DIN2353

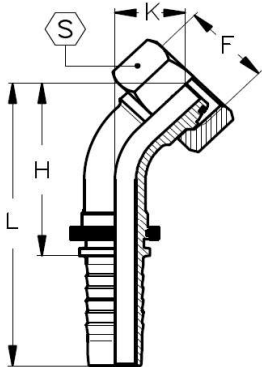

Modellen:

Serie L								
Bestelnummer	slangmaat	leiding maat	F	H	L	K	S	max. werkdruk bar*
C12D45-06L-04	1/4	6L	M12x1,5	35	63	14	17	280
C14D45-08L-04	1/4	8L	M14x1,5	36	64	14	17	280
C16D45-10L-04	1/4	10L	M16x1,5	38	66	16	19	280
C18D45-12L-04	1/4	12L	M18x1,5	39	67	17	22	280
C16D45-10L-05	5/16	10L	M16x1,5	39	67	17	19	280
C18D45-12L-05	5/16	12L	M18x1,5	39	67	18	22	280
C16D45-10L-06	3/8	10L	M16x1,5	39	69	16	19	280
C18D45-12L-06	3/8	12L	M18x1,5	40	71	18	22	280
C22D45-15L-06	3/8	15L	M22x1,5	42	72	19	27	280
C22D45-15L-08	1/2	15L	M22x1,5	46	79	19	27	280
C26D45-18L-08	1/2	18L	M26x1,5	47	80	21	32	210
C26D45-18L-10	5/8	18L	M26x1,5	53	89	22	32	210
C30D45-22L-10	5/8	22L	M30x2	54	90	23	36	210
C30D45-22L-12	3/4	22L	M30x2	62	103	25	36	210
C36D45-28L-16	1	28L	M36x2	80	131	31	41	165
C45D45-35L-20	1 1/4	35L	M45x2	96	154	40	50	100
C52D45-42L-24	1 1/2	42L	M52x2	115	179	48	60	100
Serie S								
Bestelnummer	slangmaat	leiding maat	F	H	L	K	S	max. werkdruk bar*
C14D45-06S-04	1/4	6S	M14x1,5	35	63	14	17	450
C16D45-08S-04	1/4	8S	M16x1,5	36	64	14	19	450
C18D45-10S-04	1/4	10S	M18x1,5	38	66	16	22	450
C18D45-10S-05	5/16	10S	M18x1,5	39	67	17	22	350
C20D45-12S-05	5/16	12S	M20x1,5	39	67	18	24	350
C18D45-10S-06	3/8	10S	M18x1,5	40	70	17	22	445
C20D45-12S-06	3/8	12S	M20x1,5	40	71	18	24	445
C22D45-14S-06	3/8	14S	M22x1,5	42	72	19	27	445
C22D45-14S-08	1/2	14S	M22x1,5	46	79	20	27	415
C24D45-16S-08	1/2	16S	M24x1,5	47	80	21	30	415
C30D45-20S-10	5/8	20S	M30x2	56	92	25	36	350
C30D45-20S-12	3/4	20S	M30x2	64	105	27	36	350
C36D45-25S-12	3/4	25S	M36x2	64	105	28	46	350
C36D45-25S-16	1	25S	M36x2	82	133	34	41	280
C42D45-30S-16	1	30S	M42x2	80	131	31	50	280
C52D45-38S-20	1 1/4	38S	M52x2	94	152	38	60	210
C52D45-38S-24	1 1/2	38S	M52x2	115	180	49	60	185

\* Attentie: let ook op de maximale werkdruk van de slang.