


Metrische 90° wartelkoppeling 24° conus en o-ring type D90
DIN2353

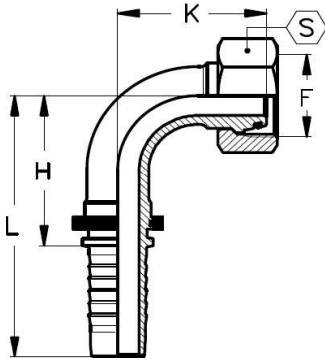

Modellen:

Serie L								
Bestelnummer	slangmaat	leiding maat	F	H	L	K	S	max. werkdruk bar*
C12D90-06L-04	1/4	6L	M12x1,5	26	53	26	17	280
C14D90-08L-04	1/4	8L	M14x1,5	29	57	29	17	280
C16D90-10L-04	1/4	10L	M16x1,5	29	57	30	19	280
C18D90-12L-04	1/4	12L	M18x1,5	29	57	32	22	280
C16D90-10L-05	5/16	10L	M16x1,5	31	59	33	19	280
C18D90-12L-05	5/16	12L	M18x1,5	28	56	32	22	280
C16D90-10L-06	3/8	10L	M16x1,5	31	61	31	19	280
C18D90-12L-06	3/8	12L	M18x1,5	31	61	33	22	280
C22D90-15L-06	3/8	15L	M22x1,5	31	61	35	27	280
C22D90-15L-08	1/2	15L	M22x1,5	37	70	38	27	280
C26D90-18L-08	1/2	18L	M26x1,5	37	70	40	32	210
C26D90-18L-10	5/8	18L	M26x1,5	44	80	45	32	210
C30D90-22L-10	5/8	22L	M30x2	44	80	47	36	210
C30D90-22L-12	3/4	22L	M30x2	54	94	52	36	210
C36D90-28L-16	1	28L	M36x2	70	121	66	41	165
C45D90-35L-20	1 1/4	35L	M45x2	84	141	83	50	100
C52D90-42L-24	1 1/2	42L	M52x2	100	164	100	60	100
Serie S								
Bestelnummer	slangmaat	leiding maat	F	H	L	K	S	max. werkdruk bar*
C14D90-06S-04	1/4	6S	M14x1,5	25	53	26	17	450
C16D90-08S-04	1/4	8S	M16x1,5	29	57	29	19	450
C18D90-10S-04	1/4	10S	M18x1,5	29	57	30	22	450
C18D90-10S-05	5/16	10S	M18x1,5	31	59	33	22	350
C20D90-12S-05	5/16	12S	M20x1,5	28	56	32	24	350
C18D90-10S-06	3/8	10S	M18x1,5	30	61	33	22	445
C20D90-12S-06	3/8	12S	M20x1,5	31	61	33	24	445
C22D90-14S-06	3/8	14S	M22x1,5	34	64	37	27	445
C22D90-14S-08	1/2	14S	M22x1,5	39	71	41	27	415
C24D90-16S-08	1/2	16S	M24x1,5	39	71	42	30	415
C30D90-20S-10	5/8	20S	M30x2	44	80	49	36	350
C30D90-20S-12	3/4	20S	M30x2	54	94	55	36	350
C36D90-25S-12	3/4	25S	M36x2	54	94	57	46	350
C36D90-25S-16	1	25S	M36x2	70	121	70	46	280
C42D90-30S-16	1	30S	M42x2	70	121	66	50	280
C52D90-38S-20	1 1/4	38S	M52x2	84	141	80	60	210
C52D90-38S-24	1 1/2	38S	M52x2	100	164	101	60	185

* Attentie: let ook op de maximale werkdruk van de slang.