



Metrische koppeling uitwendige draad met 60° conus type DM60°



Modellen:

Bestelnummer	slangmaat	F	H	L	S	max. werkdruk bar*
C10DM-03	3/16	M10x1	18,5	43,5	14	280
C12DM-03	3/16	M12x1,5	23,5	48,5	17	280
C10DM-04	1/4	M10x1	19	47	14	280
C12DM-04	1/4	M12x1,5	24	52	17	280
C14DM-04	1/4	M14x1,5	24	52	19	280
C16DM-04	1/4	M16x1,5	25	53	22	280
C18DM-04	1/4	M18x1,8	26	54	24	280
C14DM-05	5/16	M14x1,5	24	52	19	280
C16DM-05	5/16	M16x1,5	25	53	22	280
C18DM-05	5/16	M18x1,5	26	54	24	280
C14DM-06	3/8	M14x1,5	24	54,5	19	280
C16DM-06	3/8	M16x1,5	25	55,5	22	280
C18DM-06	3/8	M18x1,5	26	56,5	24	280
C18DM-08	1/2	M18x1,5	27	60	24	280
C22DM-08	1/2	M22x1,5	30	63	27	280
C26DM-10	5/8	M26x1,5	33	69	32	280
C26DM-12	3/4	M26x1,5	34	74,5	32	280
C30DM-12	3/4	M30x1,5	35	75,5	36	210
C38DM-16	1	M38x1,5	38,5	89,5	46	165
C45DM-20	1 1/4	M45x1,5	41,5	99	55	125

Metrische koppeling uitwendige draad Franse GAZ serie type GE

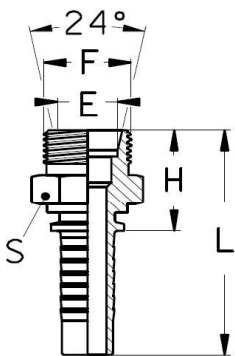

Modellen:

Bestelnummer	slangmaat	F	leidingmaat	H	L	S	max. werkdruk bar*
C20GE-13-05	5/16	M20x1,5	13,25	25	53	22	350
C30GE-21-10	5/8	M30x1,5	21,25	30	66	30	280
C30GE-21-12	3/4	M30x1,5	21,25	31	71,5	30	280
C36GE-27-12	3/4	M36x1,5	26,75	33	73,5	36	210
C45GE-33-16	1	M45x1,5	33,5	38,5	89,5	46	210
C45GE-33-20	1 1/4	M45x1,5	33,5	39,5	97	46	125

* Attentie: let ook op de maximale werkdruk van de slang.