

HIGH-LOW PRESSURE BLOCK

TYPE ET203/...





77
ENG

High/low pressure plate with port CETOP 3
HP (AP) 3/8"G, LP (BP) 1/2"G, T 3/4"G, rear.
A-B side 1/2"G
MHP - MLP side 1/4"G

TECHNICAL SPECIFICATIONS

Nominal flow:	— 40 l/min.
Max pressure:	— 300 bar
Oil viscosity:	— 2,8-380 cSt
Oil temperature:	— -10° +80° (°C)
Oil type:	— mineral HL-HLP DIN 51524
Filtration:	— 19/15 ISO 4466 (25micron)
Gaskets:	— NBR
Body material:	— GG25
Weight:	— 6.5 Kg

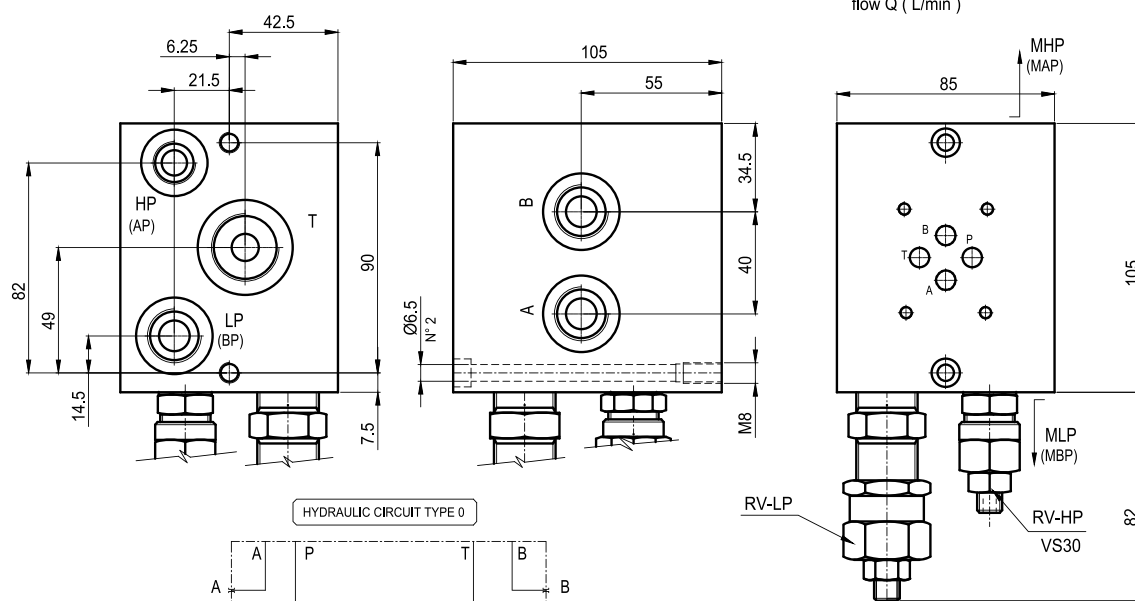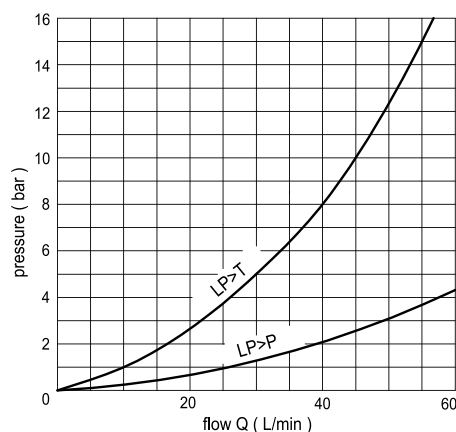

Ordering code: ET 2 0 3 / * *

Eurofluid = T
High/low pressure plate

Version port CETOP = 2

Version block standard = 0

CETOP 3

Low pressure setting
(adjust by screw)
1 F = 5-50 bar
2 F = 30-100 bar

High pressure setting
(adjust by screw)
2 F = 50-210 bar
3 F = 100-300 bar

REMARKS: See on page 91 for technical specifications of VS30 valve

HIGH-LOW PRESSURE BLOCK