Data sheet for three-phase squirrel-cage motor

Type T3A 633-4 | **Cod.** R063Y40,25AA5A00000T | **Mounting position**

IM	B35
IM	2001

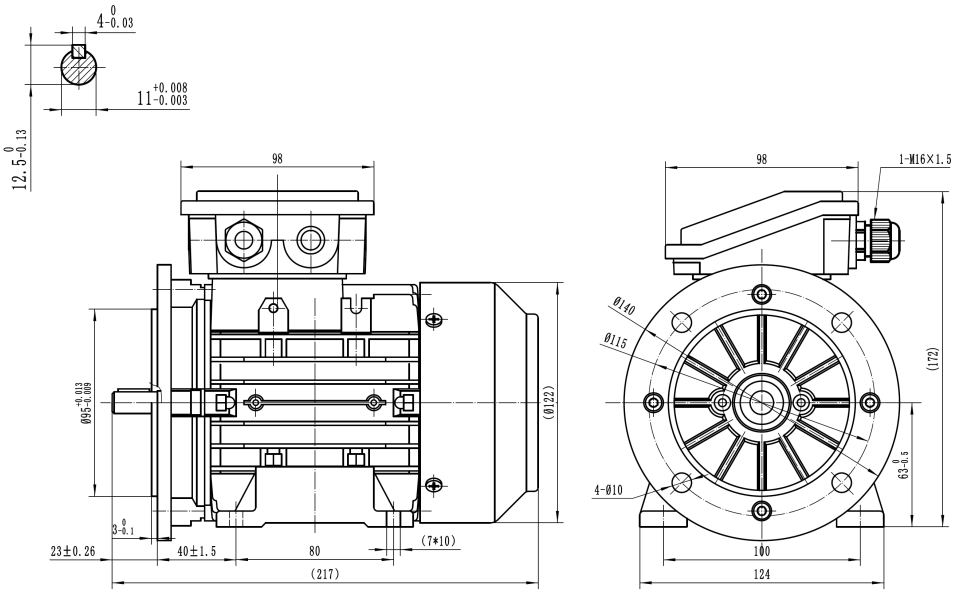

Electrical data			
Rated motor power	0.25		Kw
Rated motor speed	1395		min^{-1} 50Hz
	1675		min^{-1} 60Hz
Rated motor frequency	50		Hz
Rated motor voltage(+/-10%)	230		VΔ/50Hz
	400		VY/50Hz
	280		VΔ/60Hz
	480		VY/60Hz
Rated motor torque	1.71		Nm (Mn)
Rated motor current	1.21	VΔ/50Hz	A (In)
	0.7	VY/50Hz	A (In)
Starting motor current	4.7		xIn
Starting motor torque	2.9		xMn
Breakdown motor torque	3		xMn
Starting			D.O.L.
Efficiency class	IE3		
Efficiency	50Hz	60Hz	
	75	-	100% load
	75.1	-	75% load
	71.5	-	50% load
Power factor cosφ	0.69	-	100% load

General data		
Frame size	63	
Mounting	B35	
Weight	-	Kg
Casing material	Aluminum	
Protection	IP	55
Insulation class	H	
Tropicalization	Yes	
Vibration class	A	
Duty	S1	
Direction of rotation	Bidirectional	
Method of cooling	IC	411
Cable entry	-	
Standards	IEC/DIN/ISO/VDE/EN	
Execute at Standard	IEC 60034-1	
Feet removable	Yes	
Paintwork	7024	C2 standard
Thermal protections	n/a	

Site conditions	
Ambient temperature	from -20°C to +40°C
Altitude above sea level	1000 m

Mechanical data						
Noise level	LpA	67	dB(A)	Bearing DE side	6201-2RS-C3	
	LwA	76	dB(A)	Bearing NDE side	6201-2RS-C3	
Moment of inertia	0.00052		Kgm²	Average bearing lifetime	40000	h
Bearings type			NSK	Relubrication interval L1 DE bearing	life	h
Lubricants for bearings	See installation and maintenance manual			Relubrication interval L1 NDE bearing	life	h
				Compensation ring	NDE SIDE	standard

There may be differences between rating plate and calculated values.