


Sandwich block without lowering electric valve to accept CETOP 3 (2143) configuration.

V92 (A → T)	DENOMINAZIONE VALVOLA Valve denomination	S2-CE (X=A)	LEEG HUIS Ordering code	OS.27815
V93 (B → T)		S-CE (X=B)		OS.27817
V94 (P → T)		S2-CE (X=A)		OS.27819
		S-CE (X=B)		
		S2-CE (X=A)		
		S-CE (X=B)		


Coil, must be ordered separately

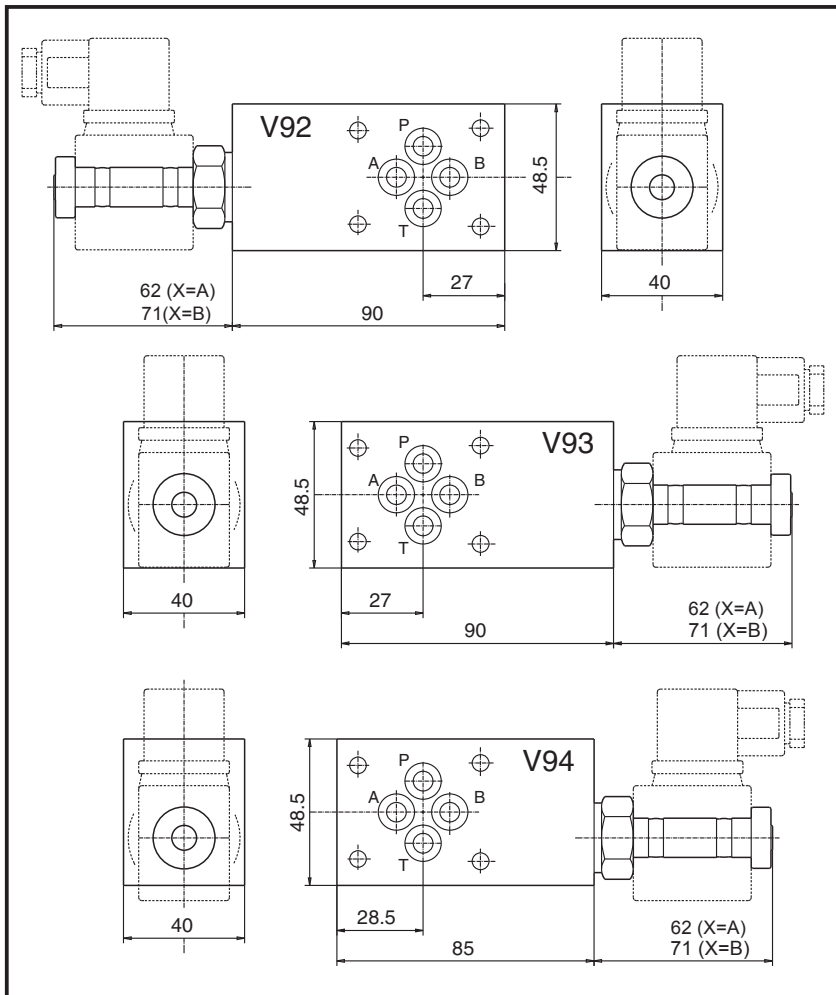

A selection of sandwich blocks without lowering electric valve to accept CETOP 3 (2143) electrovalves.

- Each block includes 4 OR 108 gaskets
- Suggested filtration: 25 micron nominal or better
- Leakage free
- Minimum voltage required: 90% of nominal

X	Schema Symbol	Funzioni possibili con solenoide: Operating features with solenoid:	
		diseccitato de-energized	eccitato energized
V92	A	A ∅ T T → A	A → T T → A
	B	A → T T → A	A ∅ T T → A
V93	A	B ∅ T T → B	B → T T → B
	B	B → T T → B	B ∅ T T → B
V94	A	P ∅ T T → P	P → T T → P
	B	P → T T → P	P ∅ T T → P

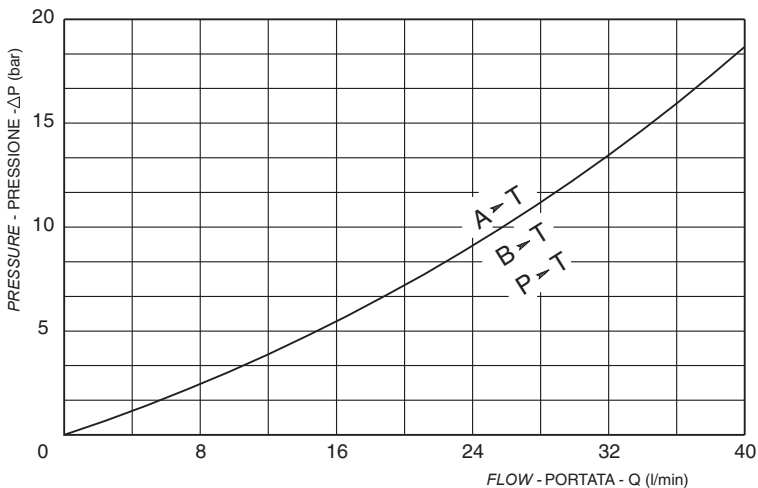

pressione di lavoro max. max working pressure	portata max. max flow
300 bar	40 l/min

Attacchi / Port Size	
flangiatura CETOP	
2.1 - 4 - 3 (luce Ø6)	