

METRIC Threads cartridge double-acting flow control valves

FT 267/2


Double-acting flow control valves available from 1/8" to 1" size - METRIC THREADS
Max.working pressure 320 Bar, adjustable oil flow rate from 0,2 to 200 Lt./min. (depending on the size)

Double-acting control

No pressure compensated flow control

METRIC threads

Carbon steel

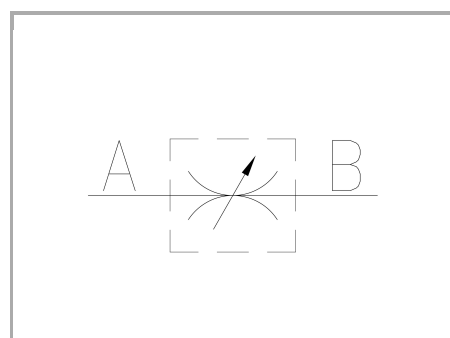

Technical information

Technical description

They allow for regulation of flow in both directions.

Materials

CORPO / BODY	Acciaio/Steel 11 S Mn Pb 37-UNI EN 10087
SPILO DI REGOLAZIONE / ADJUSTING NEEDLE	Acciaio legato/Alloy Steel
GUARNIZIONI / GASKETS	Di serie NBR - A richiesta FPM/Standard NBR-on demand FPM
ANELLI ANTIESTRUSIONE / ANTIEXTRUSION RINGS	PTFE
MANOPOLA TIPO MA - RA / KNOB TYPE MA - RA	Alluminio/Aluminum GD AlSi12- UNI EN AB 46100
MANOPOLA TIPO MP / KNOB TYPE MP	ABS






Technical data

TIPO / TYPE	PRESSIONE ESERCIZIO BAR / WORKING PRESSURE BAR	MIN. PRESSIONE SCOPPIO BAR / MIN. BURSTING PRESSURE BAR	TEMPERATURA ESERCIZIO / WORKING TEMPERATURE	GRADO DI FILTRAZIONE µm / FILTRATION GRADE µm
18	320	1300	-20°C/+100°C	25
14	320	1300	-20°C/+100°C	25
38	320	1300	-20°C/+100°C	25
12	320	1300	-20°C/+100°C	25
34	320	1300	-20°C/+100°C	25
100	320	1300	-20°C/+100°C	25

Dimensional tables and drawings

TIPO / TYPE	ØA UNI 4534	ØB	C	D	E	ØF	ØF1	G	H	L	CH	PESO / WEIGHT KG
18	M15x1	12	9,3	11,2	20,5	22	40	35	55,5	5	22	0,064
14	M20x1,5	14	11	15,5	26,5	27	50	42,5	68,5	7	27	0,125
38	M20x1,5	16	13	17,5	30,5	33	70	48,5	78,5	9	27	0,180
12	M27x2	19	15,5	24,5	40	38	80	56	96	10,5	32	0,305
34	M33x2	27	18	26	44	47	100	63,5	109	13	41	0,580
100	M42x2	35	22	30,5	52,5	58	120	82	134,5	20	50	1,185

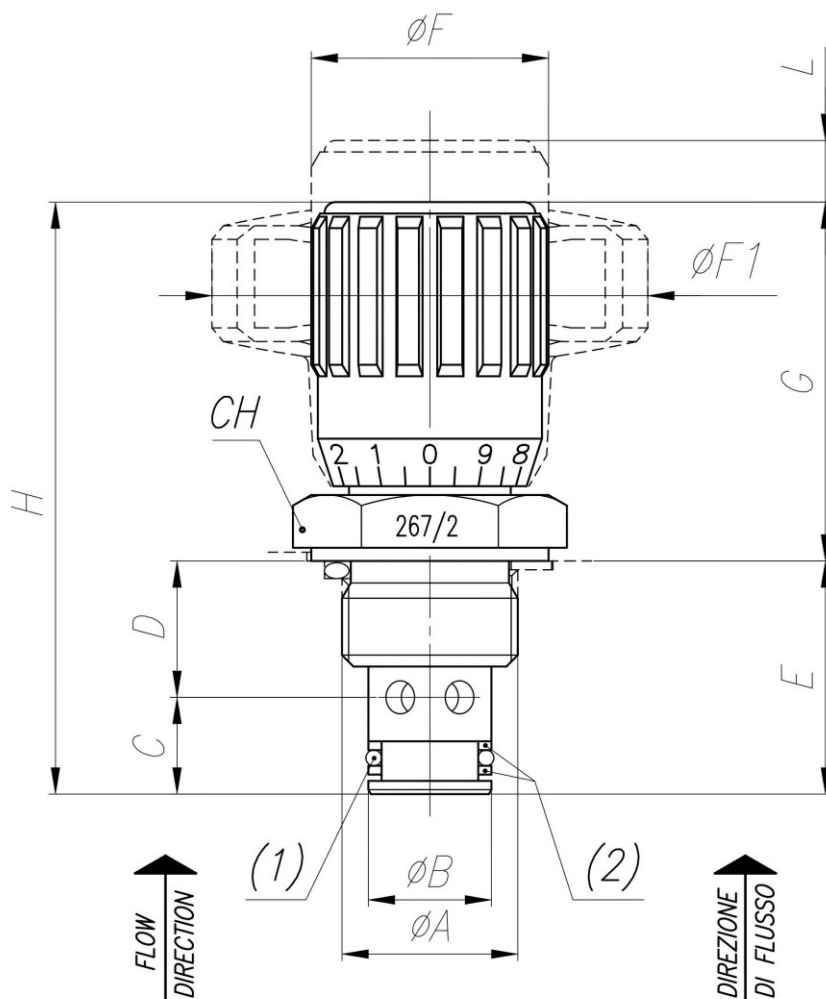

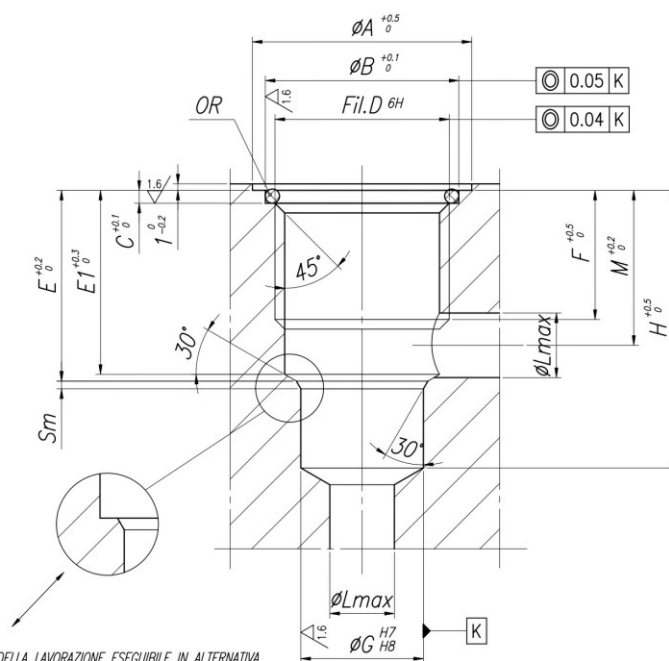


-PARTICOLARE DELLA LAVORAZIONE ESEGUIBILE IN ALTERNATIVA
A QUELLA CONICA ELIMINANDO LA QUOTA E1

-DETAIL OF THE MACHINING THAT CAN BE CARRIED OUT AS AN
ALTERNATIVE TO THE CONICAL ONE ELIMINATING THE DIMENSION E1

TENUTA REALIZZATA CON GUARNIZIONI OR SU SEDE PIANA

SEALING DONE WITH OR GASKETS ON FLAT SEATING

	ϕA	ϕB	C	D UNI 4534	E	E1	F	ϕG	H	ϕL	M	Sm	OR
18	23	19	2	M15x1	14	13	11	12	21.5	4	11.5	0.5	3056
14	28	24	2	M20x1.5	17.5	16.5	13.5	14	28.5	5	14.5	1	3075
38	28	24	2	M20x1.5	21	20.5	13.5	16	33.5	8	16.2	1.2	3075
12	34	30	2	M27x2	30	28.5	20	19	43	10	24	1.2	3100
34	43	36	2	M33x2	32.5	32	20	27	47.5	13	25	1.2	3125
100	60	45	2	M42x2	38.5	37	23.5	35	57	16	30.5	1.5	3162

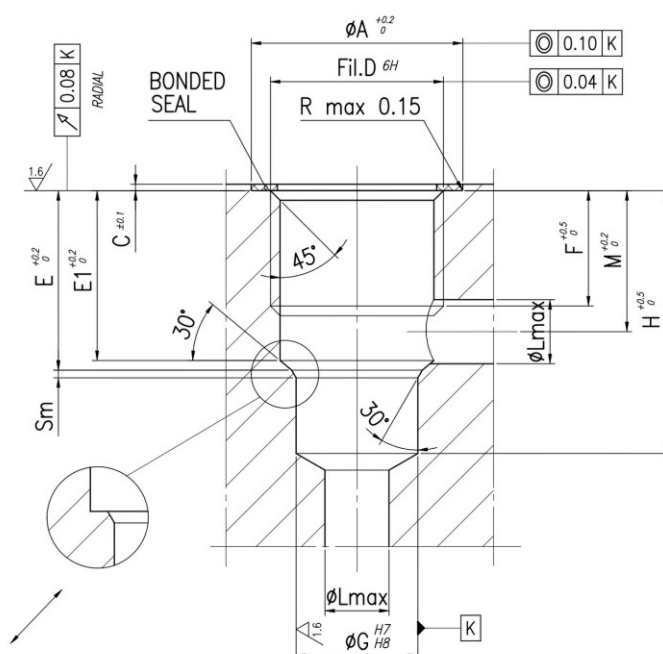


-PARTICOLARE DELLA LAVORAZIONE ESEGUIBILE IN ALTERNATIVA
A QUELLA CONICA ELIMINANDO LA QUOTA E1

-DETAIL OF THE MACHINING THAT CAN BE CARRIED OUT AS AN
ALTERNATIVE TO THE CONICAL ONE ELIMINATING THE DIMENSION E1


TENUTA REALIZZATA CON BONDED SEAL
SEALING DONE WITH BONDED SEALS

	φA	C	D UNI 4534	E	E1	F	φG	H	φL	M	Sm	BONDED SEAL
18	23	1	M15x1	13	12	9	12	20	4	10.3	0.5	400-512
14	27	1	M20x1.5	16.5	15.5	12	14	27	5	13.3	1	400-513
38	27	1	M20x1.5	20	19.5	12	16	32	8	15.2	1.2	400-513
12	33	1.3	M27x2	28	26.5	18	19	41	10	22	1.2	400-520
34	40	1.3	M33x2	30.5	30	18	27	45.5	13	23	1.2	400-515
100	50	1.3	M42x2	36.5	35	21.5	35	55	16	28.5	1.5	400-516



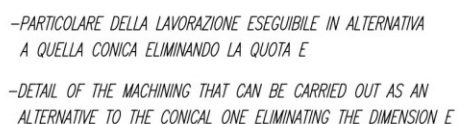



SEALING DONE WITH OR GASKETS ON CONICAL SEATING

	ØA	ØB UNI 4534	C	D	E	F	ØG	H	ØL	M	ØN	Sm	OR
18	16.5	M15x1	0.25	14	13	11	12	21.5	4	11.5	23	0.5	2050
14	22.3	M20x1.5	0.25	17.5	16.5	13.5	14	28.5	5	14.5	28	1	3068
38	22.3	M20x1.5	0.25	21	20.5	13.5	16	33.5	8	16.2	28	1.2	3068
12	29.1	M27x2	0.3	30	28.5	20	19	43	10	24	34	1.2	132
34	36	M33x2	0.3	32.5	32	20	27	47.5	13	25	43	1.2	4112
100	45	M42x2	0.3	38.5	37	23.5	35	57	16	29	60	1.5	4150




Flow rate curves

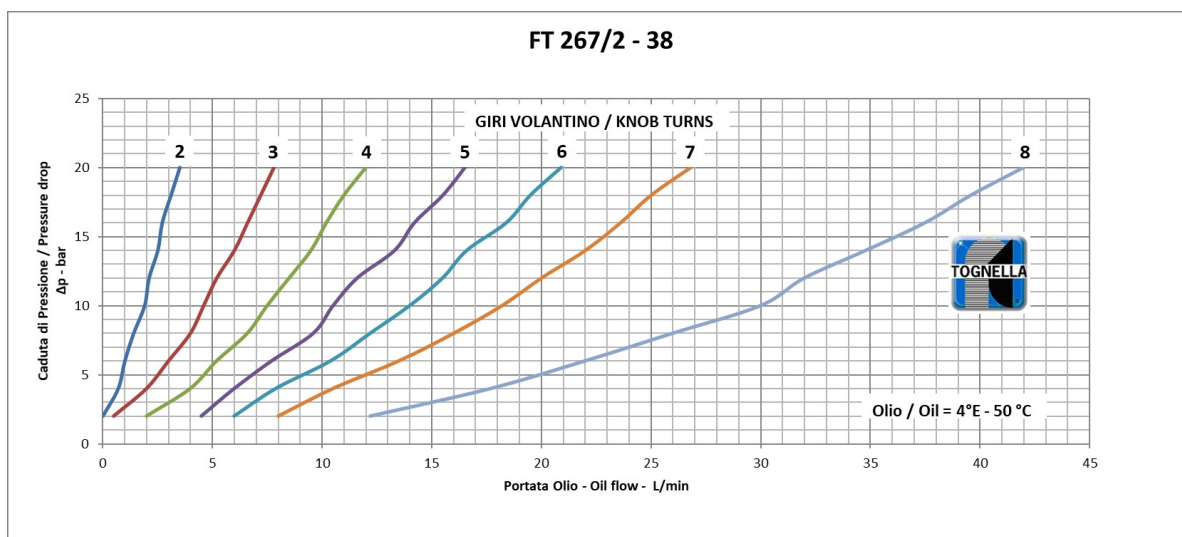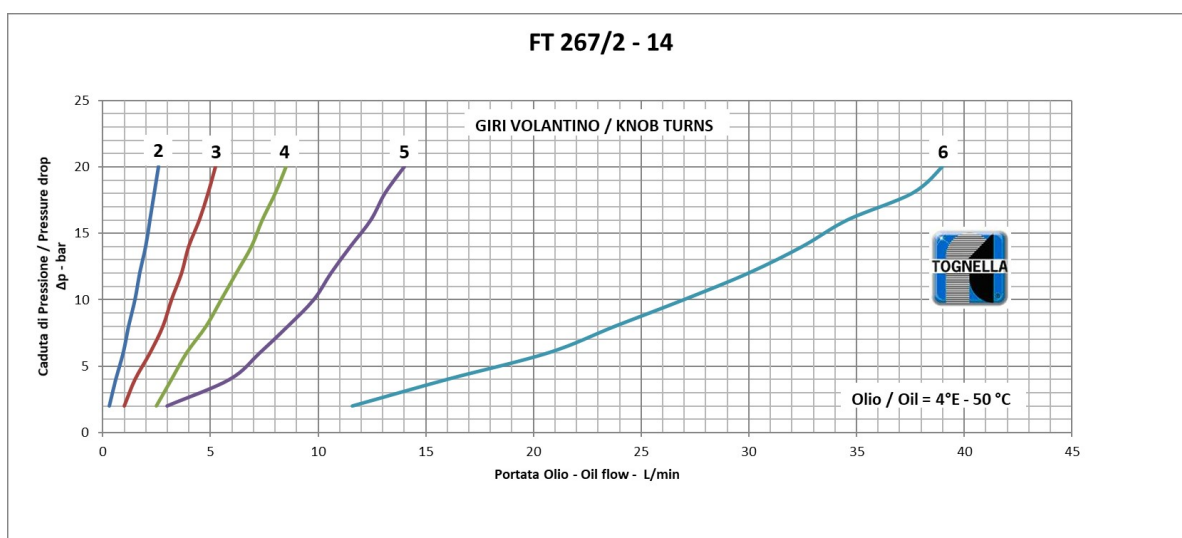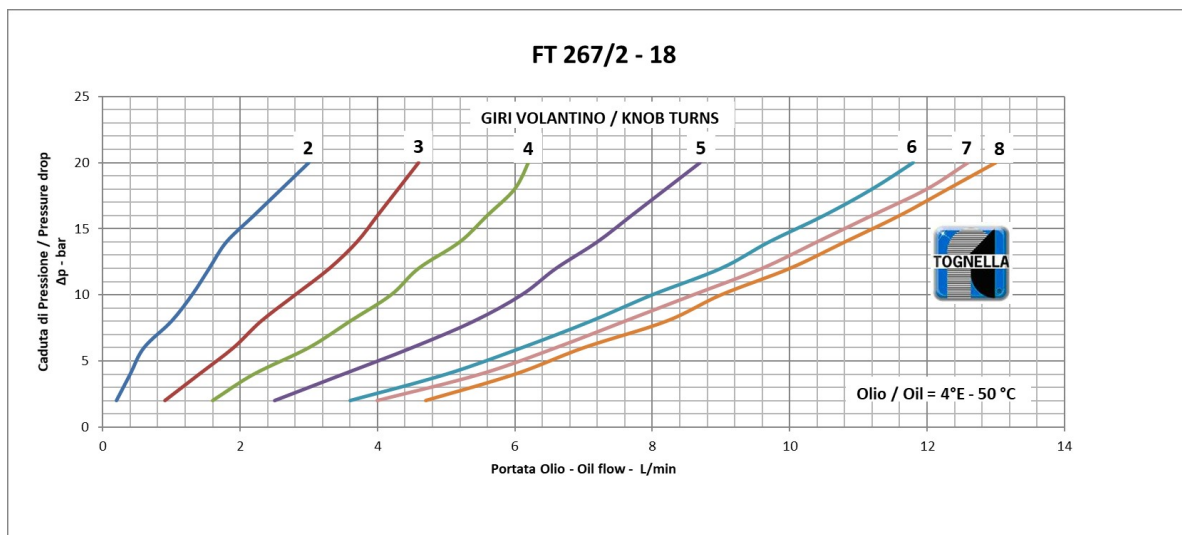




FT 267/2 - 12

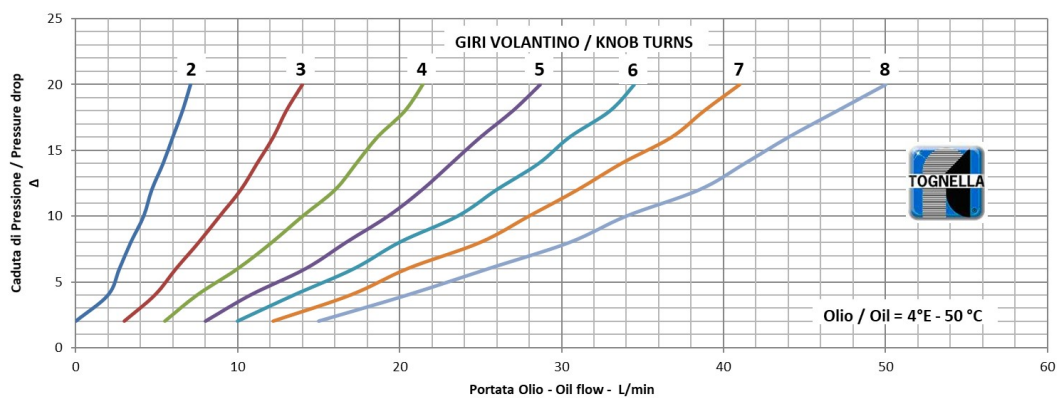

FT 267/2 - 34

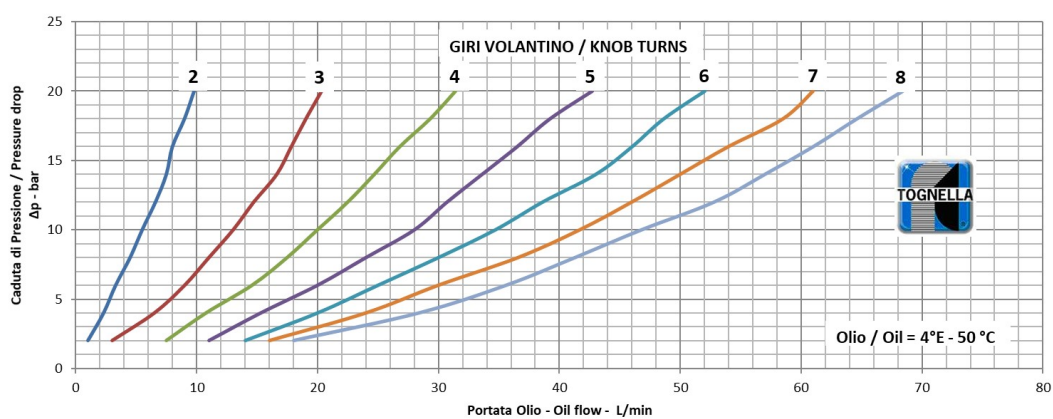

FT 267/2 - 100

